

# Marvell® 88SE9220/9230/9235/9215


## SATA 6Gb/s Host Controllers

### Overview

Marvell®, a market leader of SATA embedded controller devices, has added the Marvell 88SE9220 and Marvell 88SE9230 host controllers as cost-effective solutions for connecting Serial ATA (SATA) peripherals. The Marvell 88SE9220 and 88SE9230 connect SATA III devices to a PCI Express (PCIe) 2.0 host, delivering up to 1 Gigabyteper-second (GB/s) bandwidth. Each host controller supports two or four 6 gigabit-per-second (Gb/s) SATA peripheral interface ports and a two-lane 5.0 Gb/s PCIe host interface. In addition, it features hardware RAID running with an enhanced ARM-based processor to offload the host

CPU; Marvell proprietary Marvell HyperDuo™ technology for automated solid-state drive (SSD)/hard disk drive (HDD) tiering; on-the-fly AES 128/256-bit encryption for connected SATA SSD/HDD devices; and AHCI interface for in-box driver support. A complete suite of RAID 0/1/10 and HyperDuo software is provided, including the OS device driver, BIOS/Firmware and management utility. The Marvell 88SE9220 and 88SE9230 host controllers allow for a small footprint, highly integrated SATA III design that will enable highperforming yet cost-effective HDD, SSD and other peripheral designs.

### Block Diagram

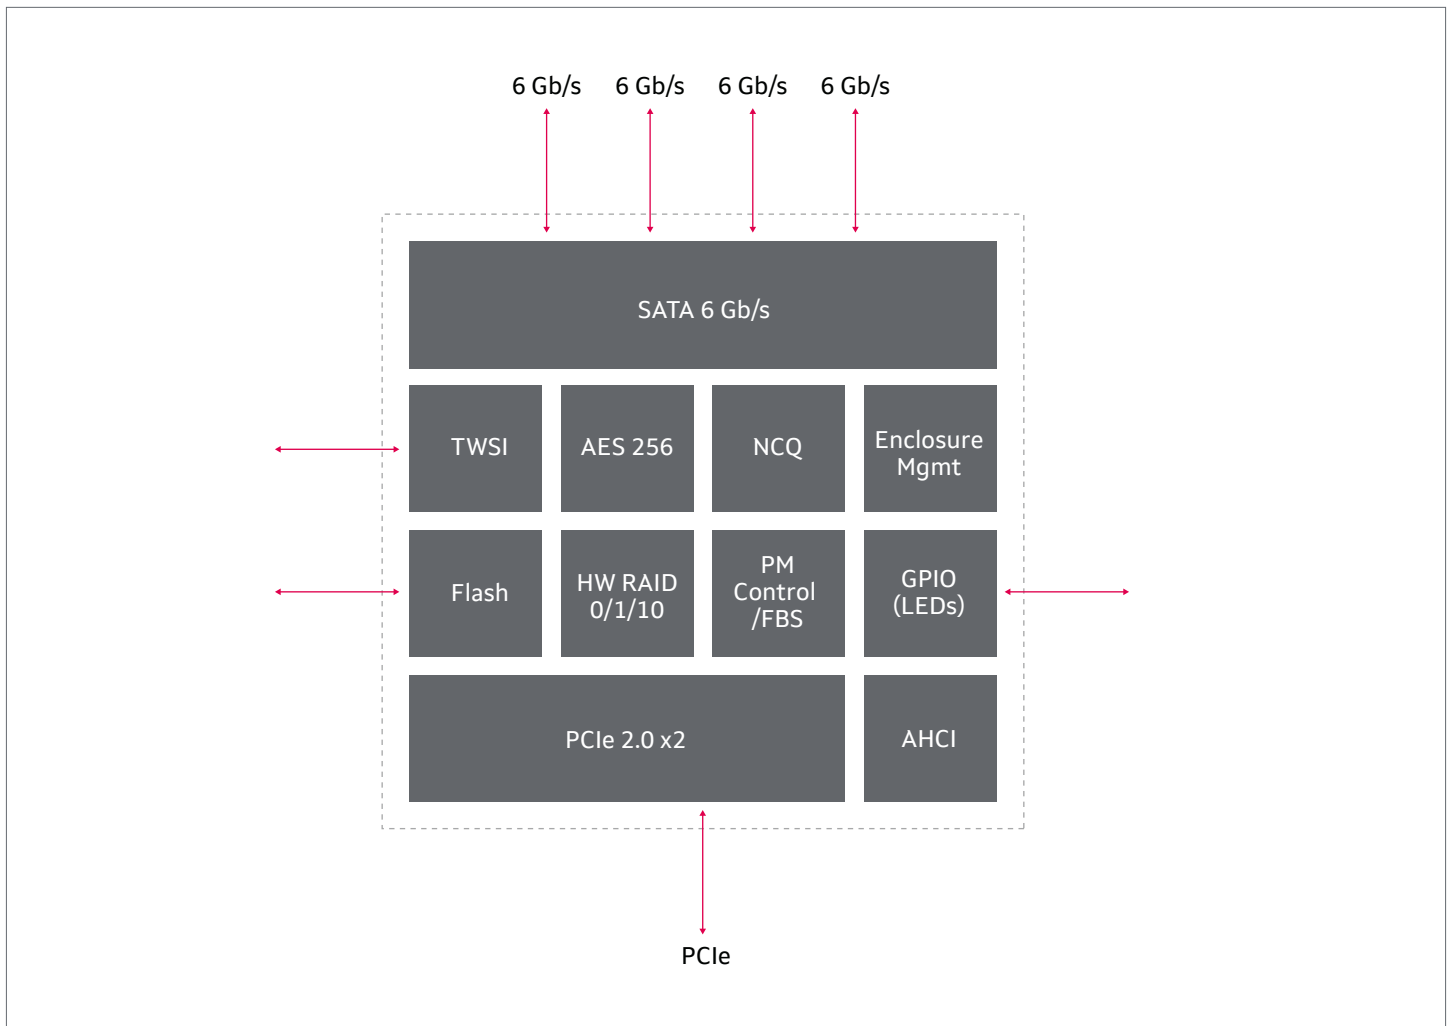

## Key Features

Model	88SE9220	88SE9230	88SE9235	88SE9215
Marvell RAID Software	Yes	Yes	No	No
Marvell HyperDuo	Yes	Yes	No	No
6 Gb/s SATA Ports	2	4	4	4
SATA 3.0 Compliant	6 Gb/s SATA PHY with speed negotiation to backward support 3 Gb/s and 1.5 Gb/s			
PCIe 2.0 Compliant	Support 1x or 2x PCI Express 2.0 interface (5.0 Gb/s)			Support 1x PCI Express 2.0 interface
Native Command Queuing	Flexible SATA ports support internal or external (up to 5m) SATA links			
eSATA Support	Flexible SATA ports support internal or external (up to 5m) SATA links			
Hardware RAID	Yes, RAID 0/1	Yes, RAID 0/1/10	No	No
AES Encryption	Yes, 128/256-bit AES	Yes, 128/256-bit AES	No	No
AHCI Inbox Driver Support	Yes	Yes	Yes	Yes
Enclosure Management	I2C support			
Two-Wire Serial Interface (TWSI)	Interface for external EEPROM containing configuration information			
GPIO Support	LEDs status monitoring			
SPI Flash Interface	External flash containing configuration data and/or boot code			
Port Multiplier Support	Yes	Yes	Yes	Yes
FIS-Based Switching	Better performance with simultaneous commands			
On-Chip Oscillator	Low-cost crystal support			
Power	1W	1W	1W	1W
Package Size/Type	7mm×7mm / 56-pin QFN	9mm×9mm / 76-pin QFN		

## Target Applications

The Marvell 88SE9220 and 88SE9230 SATA host controllers are ideal solutions for RAID on motherboard (ROMB) and cost-effective host bus adapters (HBAs). It allows PCIe-based host systems to control up to four SATA 6Gb/s HDDs or SSDs. An embedded ARM-based CPU makes this product a pure hardware RAID controller and enables in-box driver support without additional driver installation. The included Marvell Storage Utility (MSU) provides a user-friendly interface to end users, while the Marvell RAID driver allows the drives to be used with a SATA port multiplier for increased system performance and capacity.


The Marvell HyperDuo offers a breakthrough embedded technology for new generation 6Gb/s SATA Controllers, enabled on the Marvell 88SE9230 and 88SE9220. Based on years of research and patent-pending software and hardware, HyperDuo enables 80 percent of the performance of an SSD at less than half the cost. Configured with one hard drive and multiple SSDs, HyperDuo uses intelligent algorithms to automatically migrate

hot data to the SSD while enabling all data to be safely stored on a larger capacity SATA HDD for higher input/output operations per second (IOPS), throughput and capacity.


The Marvell 88SE9235 and 88SE9215 can be used for embedded platform applications such as home NAS/media servers, DVR/NVR and set-top boxes, or by HBA vendors to develop their own RAID software or in-box OS drivers.

Fully programmable on-chip transceivers support SATA, eSATA, and xSATA at 6 Gb/s and are backward compatible to 1.5 Gb/s and 3 Gb/s. Built-in support for SATA Port Multipliers with FIS-based switching ensures maximum performance. The small footprint of the device, and the few required external components, take up minimal board space, easing system design and reducing cost. Embedded enclosure management via I2C protocol, further reduces system cost

### RAID-On-Motherboard Application

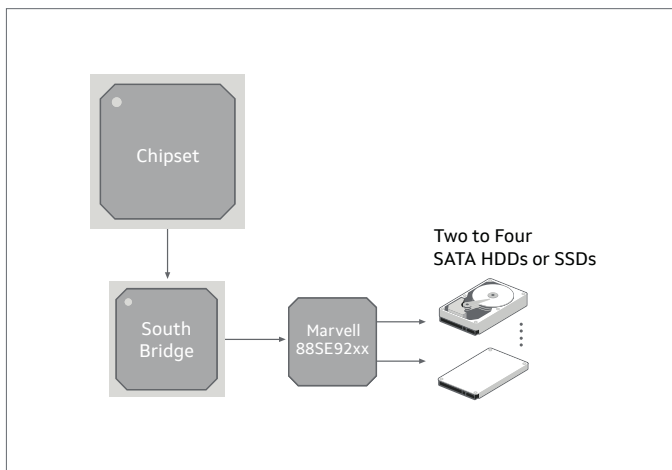

### SATA RAID HBA Application

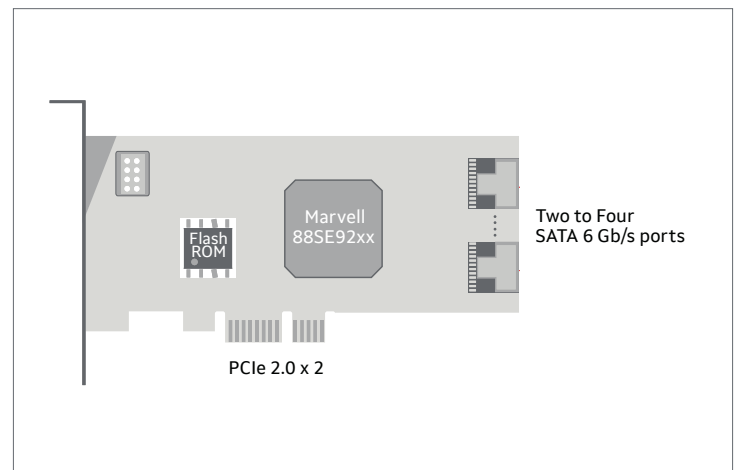

Marvell first revolutionized the digital storage industry by moving information at speeds never thought possible. Today, that same breakthrough innovation remains at the heart of the company's storage, networking and connectivity solutions. With leading intellectual property and deep system-level knowledge, Marvell semiconductor solutions continue to transform the enterprise, cloud, automotive, industrial, and consumer markets. For more information, visit [www.marvell.com](http://www.marvell.com).

© 2020 Marvell. All rights reserved. The MARVELL mark and M logo are registered and/or common law trademarks of Marvell and/or its Affiliates in the US and/or other countries. This document may also contain other registered or common law trademarks of Marvell and/or its Affiliates.